



Instant Payments Implementation Guidelines for ISO 20022 Interbank Messages

SIC IP Service

IP Settlement Account Information (camt.003/camt.004)

Version 2.3, valid from 21 November 2025

Change history

All the changes carried out in this document are listed below with the version designation, the change date, a brief description of the change and the specification of the chapters affected.

Version	Date	Description of the change	Chapter
2.3	28.02.2025	Modifications per SIC Platform Release 5.2	
		Former chapter 3.1 "Message flows" removed (editorial adjustment without functional impact to align with RTGS module documents, see "SIC IP Service Handbook" for illustrations of message flows)	
		Modifications of "Technical specifications": New reference to the base document for "ISODateTime" for the following elements camt.003/camt.004 (editorial adjustment in order to align with RTGS module documents and to avoid redundant information, no functional change in the SIC IP service): <ul style="list-style-type: none"> <i>GetAcct/MsgHdr/CreDtTm</i> <i>RtrAcct/MsgHdr/CreDtTm</i> 	4.1.1, 4.2.1
2.2	30.06.2023	Update, valid from November 2023	
		Table 5: Addition of payment types IPLQDT and IPLQDF including a note about the possible occurrence as credit or debit on the accounts involved	3.5.1
		Element <i>.../RptOrErr/AcctRpt/AcctOrErr/Acct/MulBal/Tp/Prtry</i> : Addition of payment types IPLQDT and IPLQDF	4.2.3
2.1	31.03.2023	Update, valid from November 2023	
		Code value "DBIT" added for balance types BALAS, BALAC, AVLBS and ALVBC in Table 5, incl. note in explanations for category "Balances"	3.5.1
		Chapter "Further business specifications": Updated reference to SIC platform release 4.10 (previously: release 4.9)	3.6
		Element <i>.../RptOrErr/AcctRpt/AcctOrErr/Acct/MulBal/Tp/Prtry</i> : Correction of code value for "IP System Manager reservation" (LQRSM instead of wrong value BALAC)	4.2.3
2.0	20.10.2022	Editorial update to the final document version, valid from November 2023 (removal of annotation "Stable working version", no functional changes)	
1.1	20.05.2022	Update (stable working version)	
		Source of XML schemas changed (editorial change, no schema modifications)	1.4
		Table 5: division of code values into 2 categories "Balances" and "Payments / Limits" including subsequent addition of the changed category-specific usage in element <i><MulBal></i>	3.5.1
		New chapter "Further business specifications" (clarification)	3.6
		Revision of the camt.003 "Technical specifications":	4.1.2

		<ul style="list-style-type: none"> • <i>.../AcctQryDef/AcctCrit/NewCrit/SchCrit/Bal/ValDt/Dt/EQDt</i>: A query is now possible for a maximum of 2 bank business days in the past instead of one 	
		Revision of the camt.004 "Technical specifications": <ul style="list-style-type: none"> • <i>.../RptOrErr/AcctRpt/AcctOrErr/Acct/MulBal</i> and sub-element <i>.../Tp/Prtry</i>: Revision of the definition due to new category-specific usage (see also changes to chapter 3.5.1) 	4.2.3
1.0	31.03.2022	First edition (stable working version)	All

Table 1: Change history

Please address all suggestions, corrections, and proposed improvements to this document to:

SIX Interbank Clearing Ltd

Hardturmstrasse 201

CH-8005 Zurich

E-Mail: contact.sic@six-group.com

www.six-group.com

General notes

SIX Interbank Clearing Ltd ("**SIC Ltd**") reserves the right to modify this document, as the need arises, at any time without prior notice.

SIC Ltd reserves all rights for this document including the rights of photomechanical reproduction, storage on electronic media and the translation into foreign languages.

Although great care has been taken in the compilation and preparation of this work to ensure accuracy, errors and omissions cannot be entirely ruled out. SIC Ltd cannot be held liable for any decision made or action taken in reliance on the information in this document or for any consequential, special or similar damages.

To improve readability, the use of masculine and feminine forms of language are avoided wherever possible. All personal designations are to be regarded as gender neutral.

If you detect any errors in this document or have any ideas or suggestions for improvements, we would be extremely grateful if you would notify these by e-mail to [**contact.sic@six-group.com**](mailto:contact.sic@six-group.com).

Table of contents

Change history	2
General notes	4
Table of contents	5
Table of tables	6
Table of figures.....	7
1 Introduction.....	8
1.1 Overview of the documentation structure	8
1.2 Target audience.....	8
1.3 Change control	8
1.4 XML schemas	8
1.5 Reference documents	8
2 ISO definitions	9
3 Business specifications.....	10
3.1 Use cases.....	10
3.2 Transaction types.....	10
3.3 Use of References	11
3.3.1 References in a "Get Account" (camt.003) message	11
3.3.2 References in a "Return Account" (camt.004) message	12
3.4 Query criteria "Get Account" (camt.003).....	13
3.5 Use of the "Report Or Error" (camt.004)	14
3.5.1 Balances in the "Multilateral Balance" (camt.004) element	14
3.5.2 Error information in the "Operational Error" element (camt.004).....	17
3.6 Further business specifications.....	17
4 Technical specifications	18
4.1 "Get Account" message (GetAcct, camt.003).....	18
4.1.1 Message Header (MsgHdr, A-level)	18
4.1.2 Account Query Definition (AcctQryDef, B-level).....	20
4.2 "Return Account" message (RtrAcct, camt.004).....	25
4.2.1 Message Header (MsgHdr, A-level)	25
4.2.2 Report or Error (RptorErr, B-level)	27
4.2.3 Account Report / Operational Error (AcctRpt/OprlErr, C-level).....	29

Table of tables

Table 1:	Change history	3
Table 2:	Use cases for the message types "camt.003"/"camt.004"	10
Table 3:	List of transaction types and their codes in the "camt.003" and "camt.004" messages	10
Table 4:	Query criteria in the "camt.003" message.....	13
Table 5:	Codes for the balance / payment / limit types in the "camt.004" message (Tp/Prtry, CdtDbtInd).....	16
Table 6:	Error codes in the query response in the "camt.004" message (OprlErr).....	17
Table 7:	camt.003 – Message Header (MsgHdr, A-level)	19
Table 8:	camt.003 – Account Query Definition (AcctQryDef, B-level)	24
Table 9:	camt.004 – Message Header (MsgHdr, A-level)	26
Table 10:	camt.004 – Report or Error (RptOrErr, B-level)	28
Table 11:	camt.004 – Account Report or Operational Error (AcctRpt or OprlErr, C-level).....	33

Table of figures

Figure 1:	Basic message structure of the "camt.003" message	9
Figure 2:	Basic message structure of the "camt.004" message	9
Figure 3:	Specifying the transaction type in the "camt.003" message	10
Figure 4:	Specifying the transaction type in the "camt.004" message	11
Figure 5:	Message Identification in the "camt.003" message.....	11
Figure 6:	Message Identification in the "camt.004" message.....	12
Figure 7:	Message Identification of the query message inside the "camt.004" message	12
Figure 8:	Specifying the query criteria in the "camt.003" message (Search Criteria).....	13
Figure 9:	Report or error information in the "camt.004" message (RpOrErr)	14
Figure 10:	Balance information in the "camt.004" message (Multilateral Balance)	14
Figure 11:	Balance type in the "camt.004" message (Credit Debit Indicator, Type/Proprietary).....	15
Figure 12:	Message Header (MsgHdr) "camt.003".....	18
Figure 13:	Account Query Definition (AcctQryDef) "camt.003"	20
Figure 14:	Search Criteria (SchCrit) "camt.003"	20
Figure 15:	Message Header (MsgHdr) "camt.004"	25
Figure 16:	Report or Error (RpOrErr) "camt.004"	27
Figure 17:	Account Report or Operational Error (AcctRpt or OpOrErr) "camt.004"	29

1 Introduction

1.1 Overview of the documentation structure

The Implementation Guidelines consist of a base document with general information concerning all message types, and various module documents – this document is for the message types "camt.003" and "camt.004" – with message-specific information, including information on the application-specific handling of individual elements. They specify the messages to be submitted to and delivered from the SIC IP service using the ISO 20022 message standard.

1.2 Target audience

The "Instant Payments Implementation Guidelines for ISO 20022 Interbank Messages" are addressed to all participants of the SIC IP service.

1.3 Change control

All modifications made to this document are listed in the change history showing the version, the date of the change, a brief description and references to the chapters concerned.

1.4 XML schemas

The XML schemas for "camt.003" and "camt.004" are published on the www.iso-payments.ch website:

- ***camt.003.001.07.ch.02.xsd***
- ***camt.004.001.08.ch.02.xsd***

They should preferably be opened using specialized XML software.


1.5 Reference documents

Additional information on the Implementation Guidelines can be found in the reference documents listed in the base document.

2 ISO definitions

The query message "Get Account" (camt.003) is sent by the participant to the SIC IP service to obtain the balance information of an IP Settlement Account. It is used on the basis of the ISO 20022 XML schema "camt.003.001.07".


In response to the "camt.003" query message, the SIC IP service always sends the "Return Account" (camt.004) message to the participant as a response to the "IP settlement account query". In addition, the "camt.004" message is also used in an "IP balance notification" by the SIC IP service to advise the participant that an amount limit has been exceeded or not reached. It is used on the basis of the ISO 20022 XML schema "camt.004.001.08".

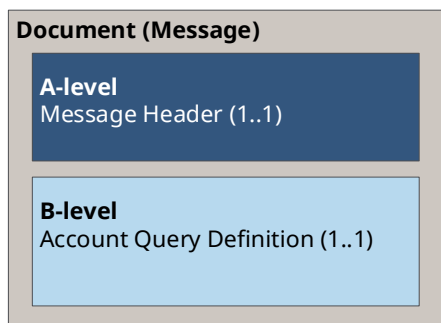

The "camt.003" message is essentially structured as follows:

- **A-level:** Message level: "Message Header" element. This block must occur exactly once.
- **B-level:** Transaction level: "Account Query" element. This block must occur exactly once.

Figure 1: Basic message structure of the "camt.003" message

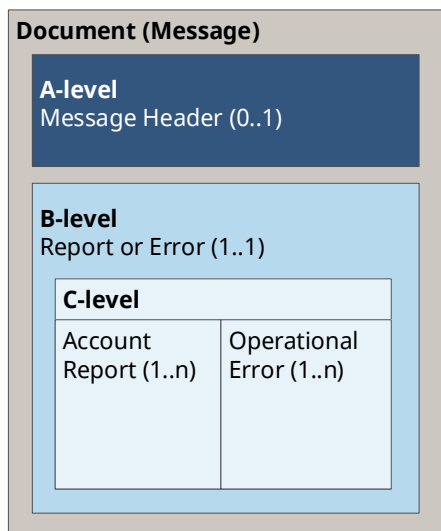

The "camt.004" message is essentially structured as follows:

- **A-level:** Message level: "Message Header" element. This block must occur exactly once.
- **B-level:** Transaction level "Report or Error" element. This block must occur exactly once.
- **C-level:** Report level: Consisting of either the "Account Report" block element (can occur at most once in the SIC IP service) or the "Operational Error" block element (can occur at most once in the SIC IP service in the query response).

Figure 2: Basic message structure of the "camt.004" message

3 Business specifications

3.1 Use cases

The "Get Account" and "Return Account" messages are used in the following use cases in the SIC IP service:

Use cases	Input/Output	ISO 20022
IP settlement account query	I/O	camt.003/camt.004
IP balance notification	O	camt.004

Table 2: Use cases for the message types "camt.003"/"camt.004"

In the "IP settlement account query" use case, the "camt.003" message is used by the participant to request account balances. The query message is always answered by the SIC IP service with the "camt.004" message. This message contains either the query result or an error message.

In the "IP balance notification" use case, receipt of the "camt.004" message by the IP participant must always be acknowledged with a "camt.025" message back to the SIC IP service. An "IP balance notification" message is only generated if an account limit set by a participant has been exceeded or not reached.

3.2 Transaction types

The following transaction types are available:

Transaction types	Code value
IP settlement account query	IPACQY
IP balance notification	IPBALN

Table 3: List of transaction types and their codes in the "camt.003" and "camt.004" messages

To allow for correct, transaction type-specific definition and validation, a corresponding code value is provided in both messages.

The identification of the transaction type in the "camt.003" message is provided as a code value in the `.../AcctQryDef/AcctCrit/NewCrit/NewQryNm` element.

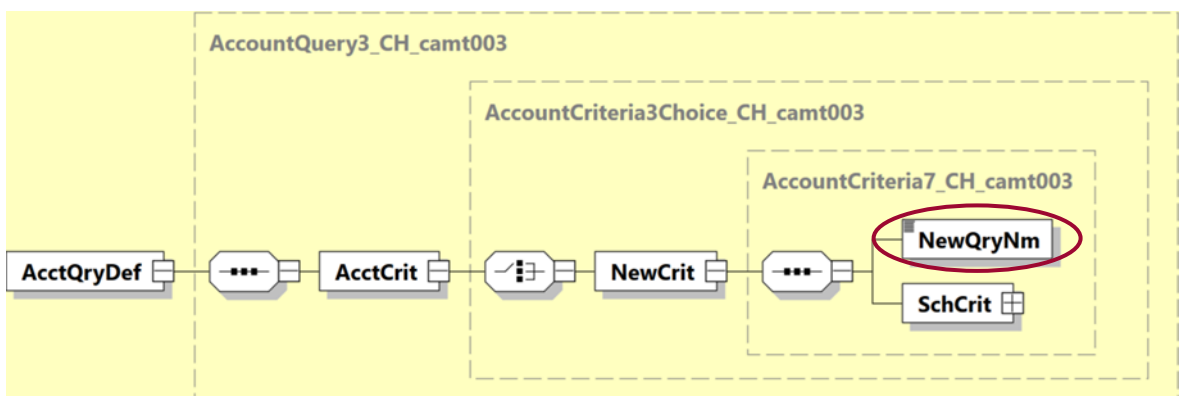


Figure 3: Specifying the transaction type in the "camt.003" message

The identification of the transaction type in the "camt.004" message is provided as a code value in the `.../MsgHdr/QryNm` element.

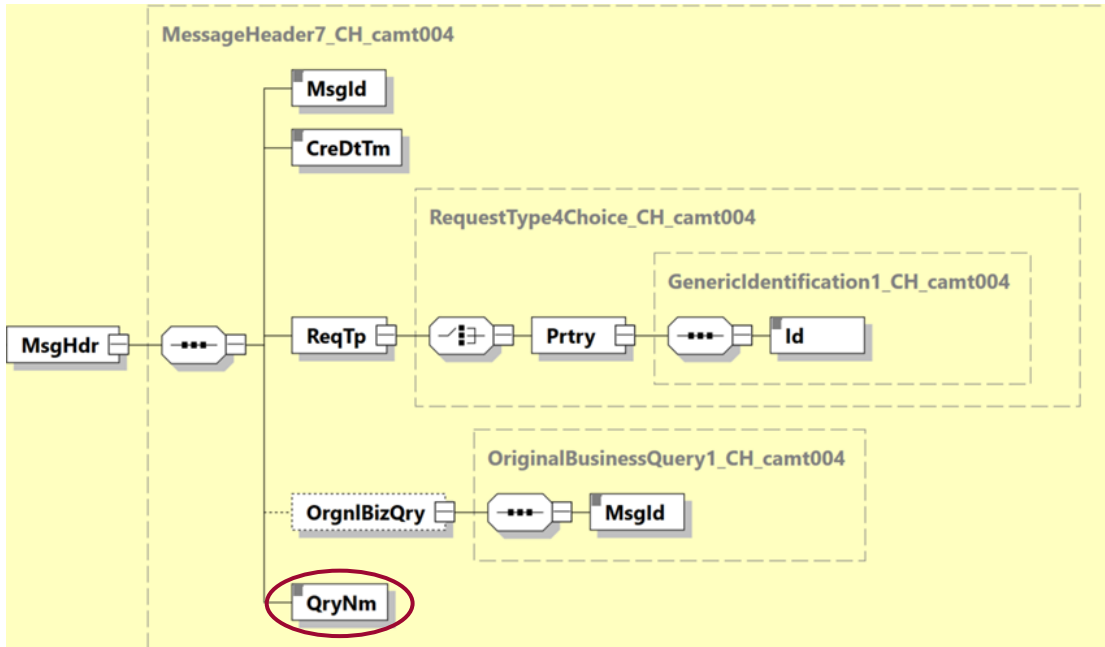


Figure 4: Specifying the transaction type in the "camt.004" message

3.3 Use of References

3.3.1 References in a "Get Account" (camt.003) message

"Message Identification" (A-level)

In the "camt.003" message, the `.../MsgHdr/MsgId` reference value is provided in the A-level by the querying participant as the unique message identification.

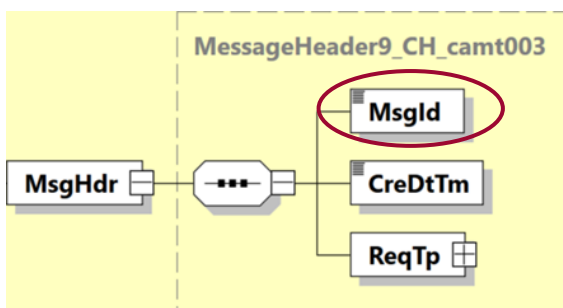


Figure 5: Message Identification in the "camt.003" message

3.3.2 References in a "Return Account" (camt.004) message

"Message Identification" (A-level)

In the "camt.004" message, the SIC IP service contains the `.../MsgHdr/MsgId` reference element as the unique message identification of the A-level.

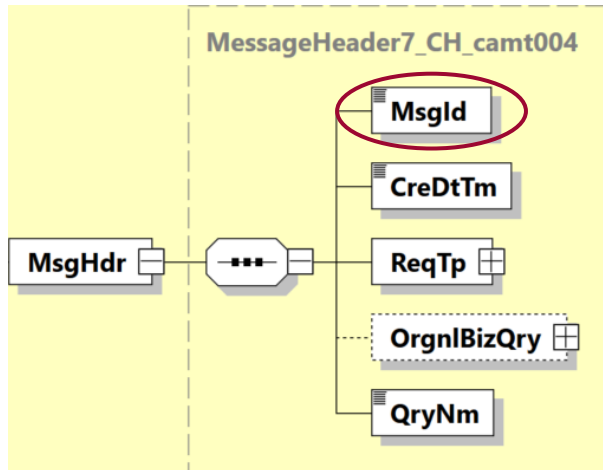


Figure 6: Message Identification in the "camt.004" message

Message identification of the query message in the "Original Business Query" element

In the "camt.004" response message of the "IP settlement account query" use case (transaction type IPACQY), the message identification of the original "camt.003" query message is returned in the `.../OrgnlBizQry/MsgId` element.

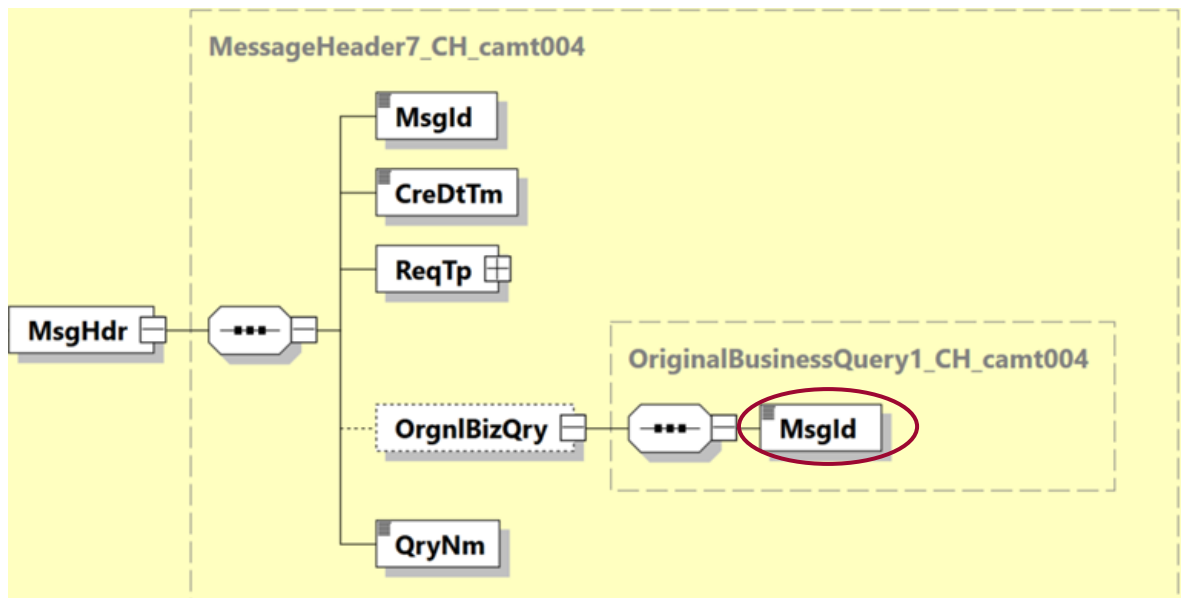


Figure 7: Message Identification of the query message inside the "camt.004" message

3.4 Query criteria "Get Account" (camt.003)

Query criteria are specified in the B-level of the "camt.003" message in the .../AcctCrit/NewCrit/SchCrit element.

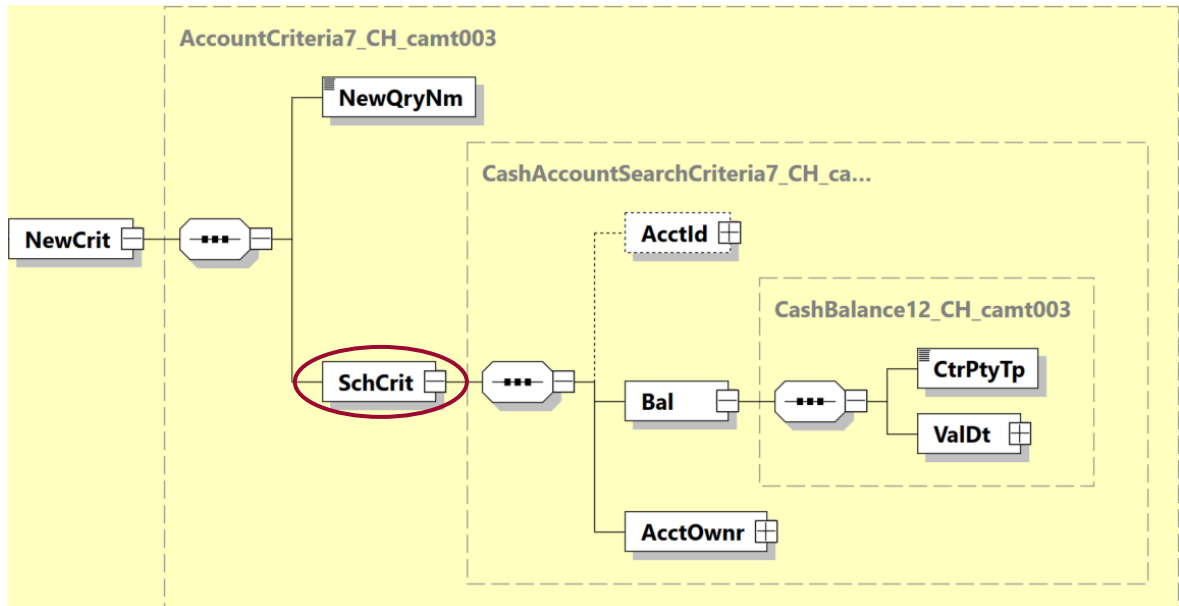


Figure 8: Specifying the query criteria in the "camt.003" message (Search Criteria)

Element	Description
<AcctId>	Identification of the IP settlement account
<Bal>/<ValDt>	The settlement date at which balance amounts are to be returned
<AcctOwnr>	Identification of the participant who owns the account

Table 4: Query criteria in the "camt.003" message

3.5 Use of the "Report Or Error" (camt.004)

For transaction type IPACQY, the query result is delivered in the *RtrAcct/RptOrErr* element as follows:

- Account details for the requested IP settlement account are delivered in the *RtrAcct/RptOrErr/AcctRpt* element.
- If an error occurred during the query, the error information is supplied in the *RtrAcct/RptOrErr/OprlErr* element.

For transaction type IPBALN, the report content is delivered in the *RtrAcct/RptOrErr* element as follows:

- Relevant account information is delivered in the *RtrAcct/RptOrErr/AcctRpt* element for any amount limits that have been exceeded or not reached.
- The *RtrAcct/RptOrErr/OprlErr* element is not used.

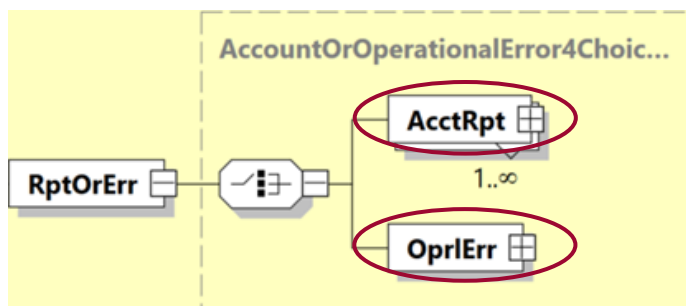


Figure 9: Report or error information in the "camt.004" message (*RptOrErr*)

3.5.1 Balances in the "Multilateral Balance" (camt.004) element

For each balance, a single instance of the *.../AcctRpt/AcctOrErr/Acct/MulBal* element is delivered in the "camt.004" message.

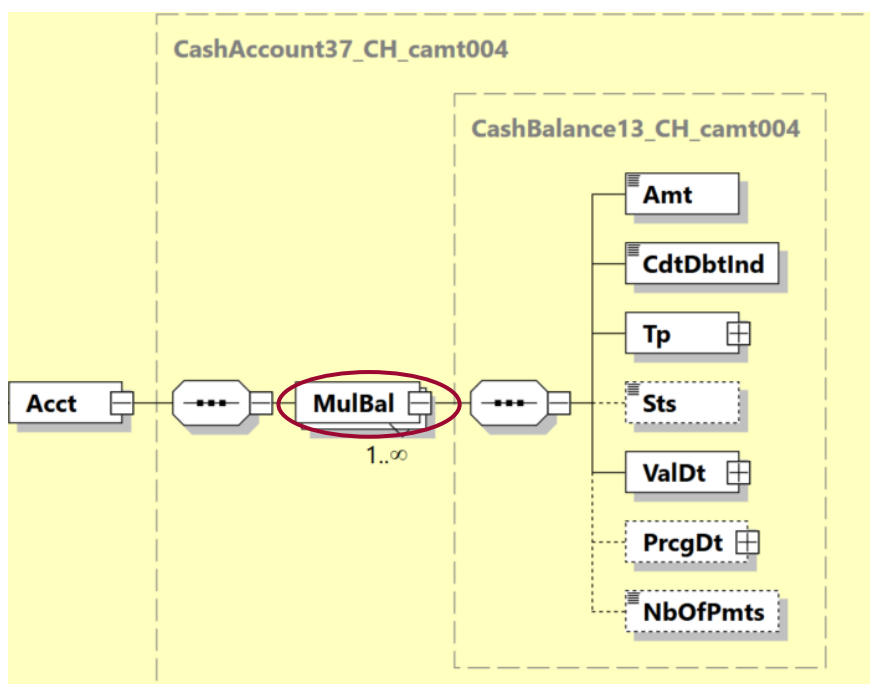


Figure 10: Balance information in the "camt.004" message (Multilateral Balance)

CashBalance13_CH_camt004

MulBal 1..∞

Amt

CdtDbtInd

BalanceType11Choice

Tp

Cd

Prtry

Sts

ValDt

PrcgDt

NbOfPmts

Page 15 of 33

The following codes are defined:

Code value (.../Tp/Prtry)	Balance / Payment / Limit type	Credit/Debit (CdtDbtInd)	Transaction type	
			IPACQY	IPBALN
Category "Balances"				
BALAS	IP account balance at start of clearing day	CRDT/DBIT ¹	X	–
BALAC	IP account balance (current)	CRDT/DBIT ¹	X	X
AVLBS	Available IP balance at start of clearing day	CRDT/DBIT ¹	X	–
AVLBC	Available IP balance (current)	CRDT/DBIT ¹	X	X
LQRSM	IP System Manager reservation	DBIT	X	X
IPRSV	SIC IP reservation	DBIT	X	X
Category "Payments/Limits"				
IPLQTT	Transfer payment to SIC IP service (settled)	CRDT	X	–
IPLQTF	Transfer payment from SIC IP service (settled)	DBIT	X	–
IPLQDT	IP liquidity distribution to IP settlement account (settled)	CRDT/DBIT ²	X	–
IPLQDF	IP liquidity distribution from IP settlement account (settled)	CRDT/DBIT ²	X	–
IPCPMT	Incoming IP customer payment (settled)	CRDT	X	–
IPCPMT	Outgoing IP customer payment (settled)	DBIT	X	–
IPCRTN	Incoming IP return (settled)	CRDT	X	–
IPCRTN	Outgoing IP return (settled)	DBIT	X	–
IPBNMU	IP balance notification (upper limit)	CRDT	X	X
IPBNML	IP balance notification (lower limit)	CRDT	X	X
IPDLMI	IP defence limit (incoming)	CRDT	X	–
IPDLMO	IP defence limit (outgoing)	CRDT	X	–

Table 5: Codes for the balance / payment / limit types in the "camt.004" message (Tp/Prtry, CdtDbtInd)

Category "Balances"

The "X" values marked in the transaction type columns indicate which values are returned for each transaction type. If there are no corresponding values for a balance, a zero value (0) is returned for the corresponding balance.

¹ For the balance types BALAS, BALAC, AVLBS and ALVBC, a negative balance (<CdtDbtInd> = DBIT) occurs exclusively when the IP transit account is queried by the system manager. For IP settlement accounts of standard participants, on the other hand, only a positive balance (<CdtDbtInd> = CRDT) can occur for these balance types.

Category "Payments/Limits"

Depending on the transaction type, the "X" values marked are only delivered if corresponding payments have been settled or corresponding limits exist.

² IP liquidity distributions are triggered exclusively by the system manager and can occur as follows for the accounts involved:

- When querying the IP settlement account of a standard participant for payment type IPLQDT exclusively as credit (<CdtDbtInd> = CRDT), for payment type IPLQDF exclusively as debit (<CdtDbtInd> = DBIT).
- When the IP transit account is queried by the system manager for payment type IPLQDT exclusively as debit (<CdtDbtInd> = DBIT), for payment type IPLQDF exclusively as credit (<CdtDbtInd> = CRDT).

3.5.2 Error information in the "Operational Error" element (camt.004)

In case of an incorrect query of the IPACQY transaction type, an error code is supplied in the response message in the .../OprlErr/Err/Prtry element:

The following codes are defined:

Code value	Event
NRSLT	No data matching the query criteria was found
NAUTH	Query is not permitted
QYINV	Invalid query criteria

Table 6: Error codes in the query response in the "camt.004" message (OprlErr)

3.6 Further business specifications

Further business specifications can be found in the base document.

4 Technical specifications

4.1 "Get Account" message (GetAcct, camt.003)

4.1.1 Message Header (MsgHdr, A-level)

The "Message Header" block (A-level of the message) occurs exactly once in the message and contains the following elements:

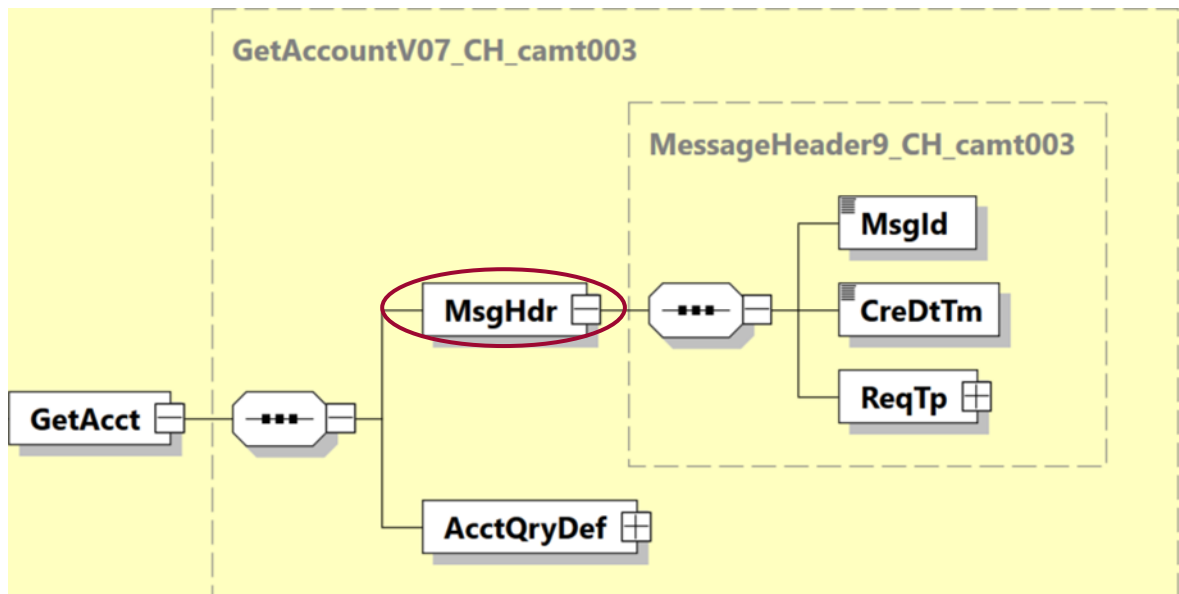


Figure 12: Message Header (MsgHdr) "camt.003"

The following table specifies all the elements of the "Message Header" block in the "camt.003" message that are relevant to the SIC IP service.

ISO 20022 Standard			Swiss ISO 20022 Payments Standard for Instant Payments	
Message Item	XML Tag	Mult	Mult	Definition
Document +Get Account V07	GetAcct	1..1	1..1	
Message Header	MsgHdr	1..1	1..1	
Message Header +Message Identification	MsgId	1..1	1..1	Message Identification Only the restricted character set excluding spaces is permitted for this element.
Message Header +Creation Date Time	CreDtTm	0..1	1..1	Creation Date Time See chapter "Times in all services (ISODateTime)" in the Implementation Guideline "Base Document".
Message Header +Request Type	ReqTp	0..1	1..1	
Message Header +Request Type ++Proprietary	Prtry	1..1	1..1	
Message Header +Request Type ++Proprietary +++Identification	Id	1..1	1..1	Clearing System Identification (proprietary) Identification of the clearing system, the following code values are available: SIC IP service (CHF only) = value SIP must be used

Table 7: camt.003 – Message Header (MsgHdr, A-level)

4.1.2 Account Query Definition (AcctQryDef, B-level)

The "Account Query Definition" block (B-level of the message) occurs once and contains the following elements:

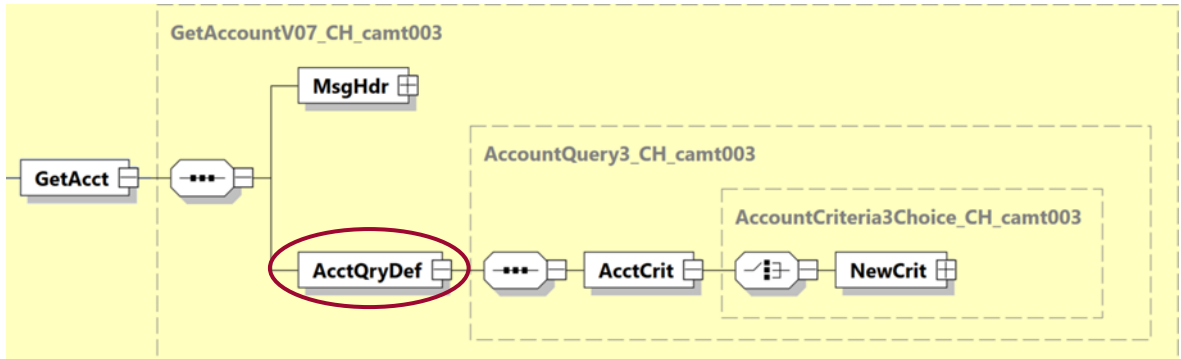


Figure 13: Account Query Definition (AcctQryDef) "camt.003"

The search criteria for the query are specified in the .../AcctCrit/NewCrit/SchCrit sub-element.

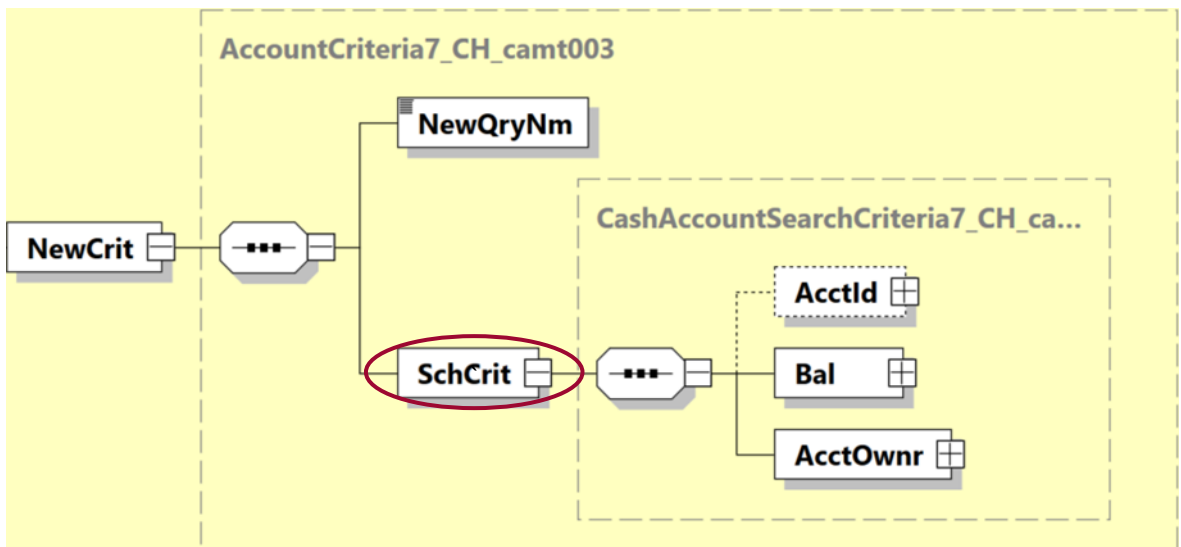


Figure 14: Search Criteria (SchCrit) "camt.003"

The following table specifies all the elements of the "Account Query Definition" block of the "camt.003" message that are relevant to the SIC IP service.

ISO 20022 Standard			Swiss ISO 20022 Payments Standard for Instant Payments	
Message Item	XML Tag	Mult	Mult	Definition
Account Query Definition	AcctQryDef	0..1	1..1	
Account Query Definition +Account Criteria	AcctCrit	0..1	1..1	
Account Query Definition +Account Criteria ++New Criteria	NewCrit	1..1	1..1	
Account Query Definition +Account Criteria ++New Criteria +++New Query Name	NewQryNm	0..1	1..1	Query Type Must be used to identify the query type. The following codes are defined: IPACQY - IP settlement account query
Account Query Definition +Account Criteria ++New Criteria +++Search Criteria	SchCrit	0..n	1..1	Search Criteria
Account Query Definition +Account Criteria ++New Criteria +++Search Criteria ++++Account Identification	AcctId	0..n	0..1	Settlement Account Information Must be used. The SIC IID specified under <AcctOwnr> must be assigned with the IP settlement account specified here.
Account Query Definition +Account Criteria ++New Criteria +++Search Criteria ++++Account Identification +++++Equal	EQ	1..1	1..1	Comparison Operator
Account Query Definition +Account Criteria ++New Criteria +++Search Criteria ++++Account Identification +++++Equal +++++Other	Othr	1..1	1..1	Identification of Settlement Account (proprietary)

ISO 20022 Standard			Swiss ISO 20022 Payments Standard for Instant Payments	
Message Item	XML Tag	Mult	Mult	Definition
Account Query Definition +Account Criteria ++New Criteria +++Search Criteria ++++Account Identification +++++Equal +++++Other +++++Identification	Id	1..1	1..1	Account Number (proprietary) Must contain the account number of an active IP settlement account (format =6n).
Account Query Definition +Account Criteria ++New Criteria +++Search Criteria ++++Balance	Bal	0..n	1..1	Selection Criteria Balance
Account Query Definition +Account Criteria ++New Criteria +++Search Criteria ++++Balance +++++Counterparty Type	CtrPtyTp	1..1	1..1	Counter Party Type Only code MULT may be provided.
Account Query Definition +Account Criteria ++New Criteria +++Search Criteria ++++Balance +++++Value Date	ValDt	0..n	1..1	Selection Criteria Settlement Date
Account Query Definition +Account Criteria ++New Criteria +++Search Criteria ++++Balance +++++Value Date +++++Date	Dt	1..1	1..1	

ISO 20022 Standard			Swiss ISO 20022 Payments Standard for Instant Payments	
Message Item	XML Tag	Mult	Mult	Definition
Account Query Definition +Account Criteria ++New Criteria +++Search Criteria ++++Balance +++++Value Date +++++Date +++++Equal Date	EQDt	1..1	1..1	Settlement Date Must be a valid banking business day. Must not be more than 2 banking business days in the past. Eligible balances for the specified date will be selected.
Account Query Definition +Account Criteria ++New Criteria +++Search Criteria ++++Account Owner	AcctOwnr	0..1	1..1	Account Owner Identifies the party submitting the query. Required for authorization checking.
Account Query Definition +Account Criteria ++New Criteria +++Search Criteria ++++Account Owner +++++Identification	Id	0..1	1..1	Identification
Account Query Definition +Account Criteria ++New Criteria +++Search Criteria ++++Account Owner +++++Identification +++++Organisation Identification	OrgId	1..1	1..1	Account Owner Identification
Account Query Definition +Account Criteria ++New Criteria +++Search Criteria ++++Account Owner +++++Identification +++++Organisation Identification +++++Any BIC	AnyBIC	0..1	0..1	Identification of Account Owner (BIC) Must not be used.

ISO 20022 Standard			Swiss ISO 20022 Payments Standard for Instant Payments	
Message Item	XML Tag	Mult	Mult	Definition
Account Query Definition +Account Criteria ++New Criteria +++Search Criteria ++++Account Owner +++++Identification ++++++Organisation Identification ++++++Other	Othr	0..n	0..1	Identification of Account Owner (proprietary) Must be used. Must contain a valid identification of an active participant. Must not be concatenated.
Account Query Definition +Account Criteria ++New Criteria +++Search Criteria ++++Account Owner +++++Identification ++++++Organisation Identification ++++++Other ++++++Identification	Id	1..1	1..1	Member Identification SIC IID (=6n), must be contained in the bank master data, active, and not concatenated.

Table 8: camt.003 – Account Query Definition (AcctQryDef, B-level)

4.2 "Return Account" message (RtrAcct, camt.004)

4.2.1 Message Header (MsgHdr, A-level)

The "Message Header" block (A-level of the message) occurs exactly once in the message and contains the following elements:

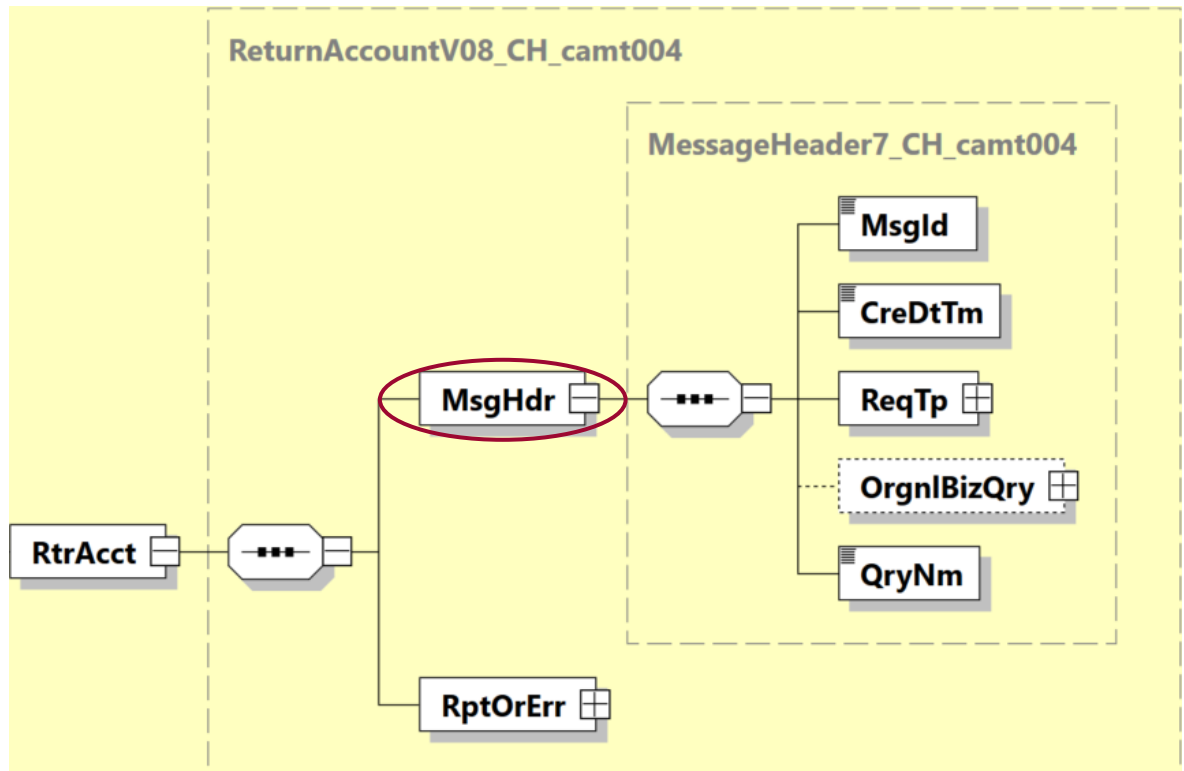


Figure 15: Message Header (MsgHdr) "camt.004"

The following table specifies all the elements of the "Message Header" block in the "camt.004" message that are relevant to the SIC IP service.

ISO 20022 Standard			Swiss ISO 20022 Payments Standard for Instant Payments	
Message Item	XML Tag	Mult	Mult	Definition
Document +Return Account V08	RtrAcct	1..1	1..1	
Message Header	MsgHdr	1..1	1..1	
Message Header +Message Identification	MsgId	1..1	1..1	Message Identification Only the restricted character set excluding spaces is permitted for this element.
Message Header +Creation Date Time	CreDtTm	0..1	1..1	Creation Date Time See chapter "Times in all services (ISODateTime)" in the Implementation Guideline "Base Document".
Message Header +Request Type	ReqTp	0..1	1..1	
Message Header +Request Type ++Proprietary	Prtry	1..1	1..1	
Message Header +Request Type ++Proprietary +++Identification	Id	1..1	1..1	Clearing System Identification (proprietary) Identification of the clearing system, the following code values are available: SIC IP service (CHF only) = value SIP must be used
Message Header +Original Business Query	OrgnlBizQry	0..1	0..1	IPACQY: Always used. IPBALN: Not used.
Message Header +Original Business Query ++Message Identification	MsgId	1..1	1..1	Original Message Identification
Message Header +Query Name	QryNm	0..1	1..1	Transaction Type Always used to identify the transaction type. The following codes are defined: IPACQY - IP settlement account query IPBALN - IP balance notification

Table 9: camt.004 – Message Header (MsgHdr, A-level)

4.2.2 Report or Error (RptOrErr, B-level)

The "Report or Error" block (B-level of the message) occurs exactly once in the message and contains the following elements:

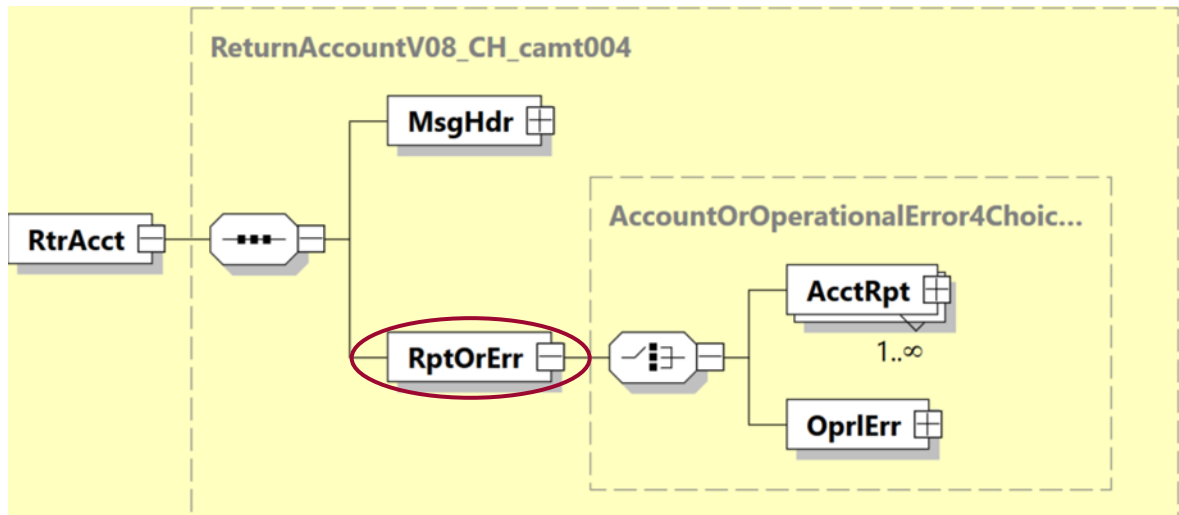


Figure 16: Report or Error (RptOrErr) "camt.004"

The following table specifies all the elements of the "Report or Error" block of the "camt.004" message that are relevant to the SIC IP service.

ISO 20022 Standard			Swiss ISO 20022 Payments Standard for Instant Payments	
Message Item	XML Tag	Mult	Mult	Definition
Report Or Error	RptOrErr	1..1	1..1	Report or Error IPACQY: Either one <AcctRpt> element returning account information or one <OprlErr> element containing error information will be delivered. IPBALN: Element <AcctRpt> with account information is always delivered.

Table 10: camt.004 – Report or Error (RptOrErr, B-level)

4.2.3 Account Report / Operational Error (AcctRpt/OprlErr, C-level)

The C-level of the message occurs once and consists of either several instances of the "Account Report" element or one instance of the "Operational Error" element:

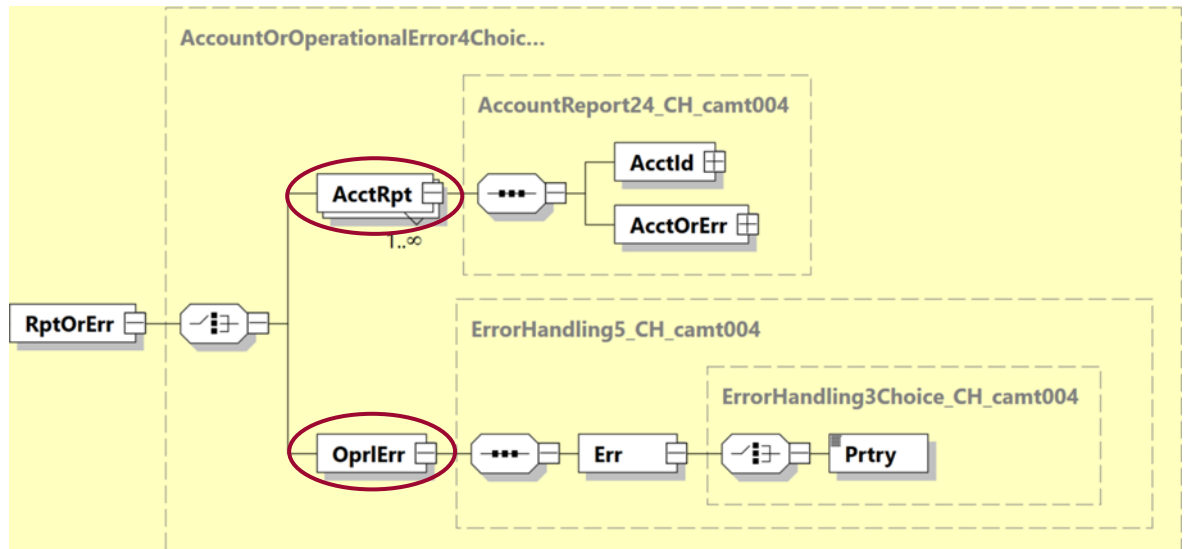


Figure 17: Account Report or Operational Error (AcctRpt or OprlErr) "camt.004"

The following table specifies all the elements of the "Account Report" and "Operational Error" blocks of the "camt.004" message that are relevant to the SIC IP service.

ISO 20022 Standard			Swiss ISO 20022 Payments Standard for Instant Payments	
Message Item	XML Tag	Mult	Mult	Definition
Account Report	AcctRpt {Or	1..n	1..n	Account Report IPACQY: Contains the account information of the queried IP settlement account. Only one occurrence is used. IPBALN: Contains relevant account information in case of exceeding or falling below an amount limit. Always used. Only one occurrence is used.
Account Report +Account Identification	AcctId	1..1	1..1	Settlement Account Identification
Account Report +Account Identification ++Other	Othr	1..1	1..1	Identification of Settlement Account (proprietary)
Account Report +Account Identification ++Other +++Identification	Id	1..1	1..1	Account Number (proprietary) Contains the account number of an active IP settlement account (format =6n).
Account Report +Account Or Error	AcctOrErr	1..1	1..1	Additional Account Information
Account Report +Account Or Error ++Account	Acct	1..1	1..1	
Account Report +Account Or Error ++Account +++Name	Nm	0..1	0..1	Name of the Account Is not used by the SIC IP service (retained in the message definition for possible future use).
Account Report +Account Or Error ++Account +++Type	Tp	0..1	0..1	Account Status Is not used by the SIC IP service (retained in the message definition for possible future use).
Account Report +Account Or Error ++Account +++Type ++++Proprietary	Prtry	1..1	1..1	Account Status (proprietary)

ISO 20022 Standard			Swiss ISO 20022 Payments Standard for Instant Payments	
Message Item	XML Tag	Mult	Mult	Definition
Account Report +Account Or Error ++Account +++Multilateral Balance	MulBal	0..n	1..n	Balance Information Provides the corresponding values for each balance type. For details on the balance types per transaction type, see Chapter 3.6.1.
Account Report +Account Or Error ++Account +++Multilateral Balance ++++Amount	Amt	1..1	1..1	Amount
Account Report +Account Or Error ++Account +++Multilateral Balance ++++Credit Debit Indicator	CdtDbtInd	1..1	1..1	Credit Debit Indicator Qualifies the amount provided in the <Amt> element as a credit or debit amount.
Account Report +Account Or Error ++Account +++Multilateral Balance ++++Type	Tp	0..1	1..1	Balance Type
Account Report +Account Or Error ++Account +++Multilateral Balance ++++Type +++++Code	Cd {Or	1..1	1..1	Balance Type (code) Not used.

ISO 20022 Standard			Swiss ISO 20022 Payments Standard for Instant Payments	
Message Item	XML Tag	Mult	Mult	Definition
Account Report +Account Or Error ++Account +++Multilateral Balance ++++Type +++++Proprietary	Prtry Or}	1..1	1..1	Payment Type or Balance Type (proprietary) The following code values are used for category "Balances": BALAS = IP account balance at start of clearing day BALAC = IP account balance (current) AVLBS = Available IP balance at start of clearing day AVLBC = Available IP balance (current) LQRSM = IP System Manager reservation IPRSV = SIC IP reservation The following code values are used for category "Payments / Limits": IPLQTT = Transfer payment to SIC IP service (settled) IPLQTF = Transfer payment from SIC IP service (settled) IPLQDT = IP liquidity distribution to IP settlement account (settled) IPLQDF = IP liquidity distribution from IP settlement account (settled) IPCPMT = IP customer payment (settled) IPCRTN = IP return (settled) IPBNMU = IP balance notification (upper limit) IPBNML = IP balance notification (lower limit) IPDLMI = IP defence limit (incoming) IPDLMO = IP defence limit (outgoing)
Account Report +Account Or Error ++Account +++Multilateral Balance ++++Status	Sts	0..1	0..1	Status Code Not used.
Account Report +Account Or Error ++Account +++Multilateral Balance ++++Value Date	ValDt	0..1	1..1	

ISO 20022 Standard			Swiss ISO 20022 Payments Standard for Instant Payments	
Message Item	XML Tag	Mult	Mult	Definition
Account Report +Account Or Error ++Account +++Multilateral Balance ++++Value Date +++++Date	Dt	1..1	1..1	Settlement Date
Account Report +Account Or Error ++Account +++Multilateral Balance ++++Processing Date	PrcgDt	0..1	0..1	Is not used by the SIC IP service (retained in the message definition for possible future use).
Account Report +Account Or Error ++Account +++Multilateral Balance ++++Number Of Payments	NbOfPmts	0..1	0..1	Number of Payments Provides the number of payments included in the stated amount. Used only with the following payment or balance types: IPRSV, IPLQTT, IPLQTF, IPCPMT, IPCRTN
Operational Error	OprlErr Or}	1..n	1..1	Error IPACQY: If the query can not be performed for any reason, an error will be returned. IPBALN: Not used.
Operational Error +Error	Err	1..1	1..1	
Operational Error +Error ++Proprietary	Prtry	1..1	1..1	Error Code (proprietary) The reason for the error is specified by a proprietary error code. The following error codes are defined: NRSLT: No data matching the query criteria was found NAUTH: Query is not permitted QYINV: Invalid query criteria

Table 11: camt.004 – Account Report or Operational Error (AcctRpt or OprlErr, C-level)