



Instant Payments Implementation Guidelines for ISO 20022 Interbank Messages

SIC IP Service

IP Liquidity Distribution System Manager (pacs.009)

Version 1.2, valid from 21 November 2025

Revision history

All the changes carried out in this handbook are listed below with the version designation, the change date, a brief description of the change and the specification of the chapters affected.

Version	Date	Description of the change	Chapter
1.2	28.02.2025	Modifications per SIC Platform Release 5.2	
		Modifications of "Technical specifications": <ul style="list-style-type: none"> New reference to the base document for "ISODateTime" for the following element (editorial adjustment in order to align with RTGS module documents and to avoid redundant information, no functional change in the SIC IP service): <ul style="list-style-type: none"> .../GrpHdr/CreDtTm Element .../CdtTrfTxInf/IntrBkSttlmDt: Revision of definition due to changed system behavior for validation, processing and delivery of the clearing day (CR2025-SIC4-0014) 	4.1
			4.2
1.1	31.03.2023	Update, valid from November 2023	
		New CH schema version pacs.009.001.08.ch.03.xsd (alignment with SIC RTGS service without functional impact on SIC IP service, details according to separate document "Overview and Change Log for the XML schemas")	1.4
		Chapter "Further business specifications": Updated reference to SIC platform release 4.10 (previously: release 4.9)	3.7
1.0	20.10.2022	First edition	All

Table 1: Revision history

Please address all suggestions, corrections and proposed improvements to this document to:

SIX Interbank Clearing Ltd
Hardturmstrasse 201
CH-8005 Zurich
E-Mail: contact.sic@six-group.com
www.six-group.com

General notes

SIX Interbank Clearing Ltd ("**SIC Ltd**") reserves the right to modify this document, as the need arises, at any time without prior notice.

SIC Ltd reserves all rights for this document including the rights of photomechanical reproduction, storage on electronic media and the translation into foreign languages.

Although great care has been taken in the compilation and preparation of this work to ensure accuracy, errors and omissions cannot be entirely ruled out. SIC Ltd cannot be held liable for any decision made or action taken in reliance on the information in this document or for any consequential, special or similar damages.

To improve readability, the use of masculine and feminine forms of language are avoided wherever possible. All personal designations are to be regarded as gender neutral.

If you detect any errors in this document or have any ideas or suggestions for improvements, we would be grateful if you would notify these by e-mail to [**contact.sic@six-group.com**](mailto:contact.sic@six-group.com).

Table of contents

Revision history	2
General notes	3
Table of contents	4
Table of tables	5
Table of figures	6
1 Introduction	7
1.1 Overview of the documentation structure	7
1.2 Target audience	7
1.3 Change control	7
1.4 XML schema	7
1.5 Reference documents	7
2 ISO definitions	8
3 Business specifications	9
3.1 Use case	9
3.2 Payment types	10
3.3 Naming of the parties in an IP liquidity distribution	11
3.4 Identifying financial institutions (Agents)	12
3.5 Use of account information	12
3.6 Use of references	13
3.6.1 Message reference	13
3.6.2 Transaction reference	13
3.6.3 Debtor reference	14
3.6.4 Unique End-to-end Transaction Reference	14
3.7 Further business specifications	14
4 Technical specifications	15
4.1 Group Header (GrpHdr, A-level)	15
4.2 Credit Transfer Transaction Information (CdtTrfTxInf, B-level)	18

Table of tables

Table 1:	Revision history	2
Table 2:	Use case for the ISO 20022 message type "pacs.009"	9
Table 3:	List of payment types for liquidity distribution and their code values in the "pacs.009" message	10
Table 4:	Names of the parties involved in liquidity distributions	11
Table 5:	List of the accounts of all parties (use of account information)	12
Table 6:	Group Header (GrpHdr, A-level)	17
Table 7:	Credit Transfer Transaction Information (CdtTrfTxInf, B-level)	30

Table of figures

Figure 1:	Basic message structure of the "pacs.009" message	8
Figure 2:	Specifying the payment type in the "pacs.009" message	10
Figure 3:	Account identification (Identification).....	12
Figure 4:	Message Identification.....	13
Figure 5:	Transaction Identification.....	13
Figure 6:	Debtor Reference (End to End Identification)	14
Figure 7:	Group Header (GrpHdr)	15
Figure 8:	Credit Transfer Transaction Information (CdtTrfTxInf)	19

1 Introduction

1.1 Overview of the documentation structure

The Implementation Guidelines consist of a base document with general information concerning all message types, and various module documents – this document is for the message type "pacs.009" – with message-specific information, including information on the application-specific handling of individual elements. They specify the messages to be submitted to and delivered from the SIC IP service using the ISO 20022 message standard.

1.2 Target audience

This Implementation Guideline is intended exclusively for the System Manager of the SIC IP service.

1.3 Change control

All modifications made to this document are listed in the change history showing the version, the date of the change, a brief description and references to the chapters concerned.

1.4 XML schema

The XML schema for "pacs.009" is published on the www.iso-payments.ch website:

- ***pacs.009.001.08.ch.03.xsd***


It should preferably be opened using specialized XML software.

1.5 Reference documents

Additional information on the Implementation Guidelines can be found in the reference documents listed in the base document.

2 ISO definitions

The "Financial Institution Credit Transfer" message (pacs.009) is used by the System Manager in the SIC IP service to add liquidity to or skim liquidity from a participant's SIC IP settlement account. This service-internal liquidity distribution, which is only available to the System Manager, is always debited from or credited to the SIC IP transit account of the System Manager. It is used on the basis of the ISO 20022 XML schema "pacs.009.001.08".

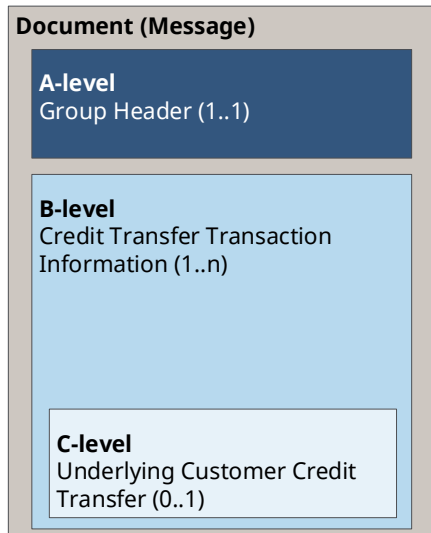

The "pacs.009" message is essentially structured as follows:

A-level: Message level, "*Group Header*" element.
This block must occur exactly once.

B-level: Payment or transaction level, "*Credit Transfer Transaction Information*" element.
This block must occur at least once and can occur n times in the ISO definition.
In the SIC IP service, this block is only permitted once.

C-level: Customer payment level, "*Underlying Customer Credit Transfer*" element.
This block is not used in the SIC IP service.

Figure 1: Basic message structure of the "pacs.009" message

3 Business specifications

3.1 Use case

The "Financial Institution Credit Transfer" message is used by the System Manager in the following use case in the SIC IP service:

Use case	Input/Output	ISO 20022
IP liquidity distribution system manager	I	pacs.009

Table 2: Use case for the ISO 20022 message type "pacs.009"

Notes:

- For the use case "IP liquidity distribution system manager", the message must be submitted by the System Manager in the SIC IP service. The System Manager receives an "IP execution confirmation" (pacs.002) in the SIC IP service after execution of the liquidity distribution. The pacs.009 message is not delivered after the settlement has been executed.
- There is no message flow to the holder of the participant's SIC IP settlement account involved in this use case.

3.2 Payment types

The following payment types are available:

Payment type	Code value
IP liquidity distribution to IP settlement account	IPLQDT
IP liquidity distribution from IP settlement account	IPLQDF

Table 3: List of payment types for liquidity distribution and their code values in the "pacs.009" message

To ensure that specific payment types can be defined and validated correctly, the corresponding code values are provided in the `.../CdtTrfTxInf/PmtTpInf/LclInstrm/Prtry` element for identification purposes.

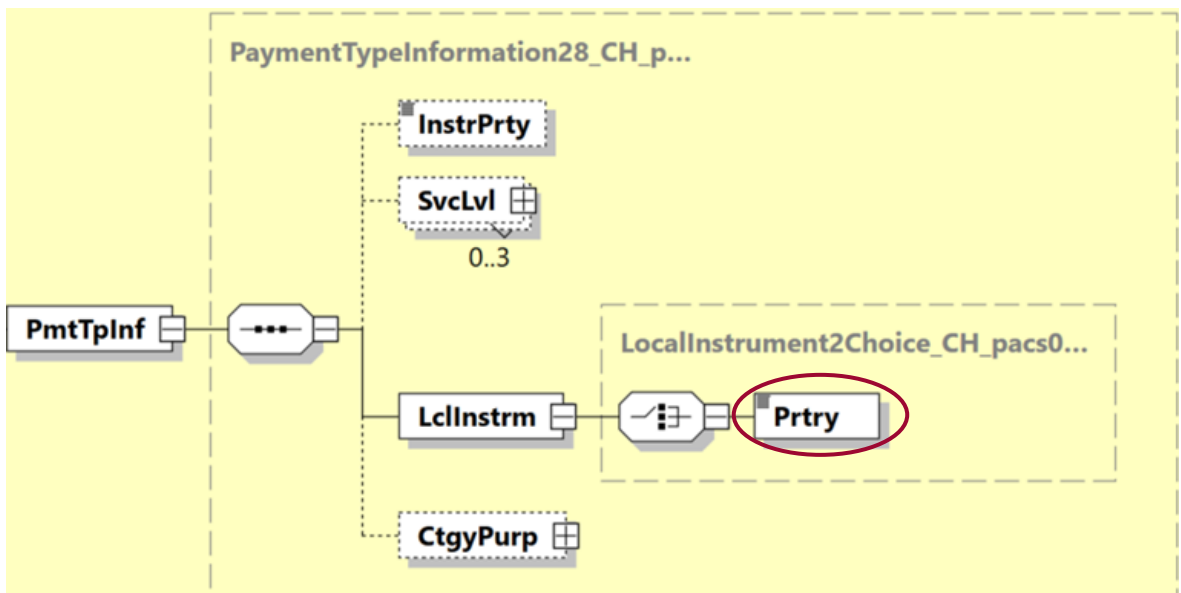


Figure 2: Specifying the payment type in the "pacs.009" message

Notes:

- For the payment type "IP liquidity distribution to IP settlement account", the System Manager's SIC IP transit account will be debited, and the participant's IP settlement account will be credited.
- For the payment type "IP liquidity distribution from IP settlement account", the participant's IP settlement account will be debited, and the System Manager's SIC IP transit account will be credited.

3.3 Naming of the parties in an IP liquidity distribution

The parties involved in IP liquidity distributions are named as follows:

Name	Comment	ISO 20022
Debtor	The instructing institution (must be identical to the instructing participant)	Debtor
Instructing Participant	The instructing participant has a settlement account in the SIC IP service which is debited	Instructing Agent [Member ID]
Instructed Participant	The instructed participant has a settlement account in the SIC IP service which is credited	Instructed Agent [Member ID]
Creditor	The instructed institution (must be identical to the instructed participant)	Creditor

Table 4: Names of the parties involved in liquidity distributions

Notes on the individual parties:

Debtor/Creditor

- The "Debtor"/"Creditor" elements correspond to the instructing and instructed institution respectively and must always be supplied.
- The instructing participant must be identical to the debtor. This means that all the data in the "Debtor" element must have the same content (identical string) as the data in the "Instructing Agent" element.
- The instructed participant must be identical to the creditor. This means that all the data in the "Creditor" element must have the same content (identical string) as the data in the "Instructed Agent" element.

Instructing Participant / Instructed Participant

- The "Instructing Agent" element is a compulsory field and is used together with the "Transaction Identification" element and the "Message Identification" for duplicate checking.
- The "Instructed Agent" element must be filled in with the system participant on the creditor side.
- The two elements "Instructing Agent"/"Instructed Agent" are used at the <CdtTrfTxInf> level; entering them at the <GrpHdr> level is not supported.
- Depending on the payment type, the "Instructing Agent" or "Instructed Agent" parties must be filled in as follows:
 - IPLQDT: "Instructing Agent" contains the identification of the System Manager (which is assigned to the SIC IP transit account), "Instructed Agent" contains the identification of the SIC IP participant to be credited.
 - IPLQDF: "Instructing Agent" contains the identification of the SIC IP participant to be debited, "Instructed Agent" the identification of the System Manager (which is assigned to the SIC IP transit account).

3.4 Identifying financial institutions (Agents)

All the necessary information is provided at the element level in chapter 4 "Technical specifications".

3.5 Use of account information

IP liquidity distributions must be supplied with both the settlement account to be debited and the settlement account to be credited. The account number must be supplied in the form of a proprietary account number (format = 6n) in the .../Id/Othr/Id sub-element.

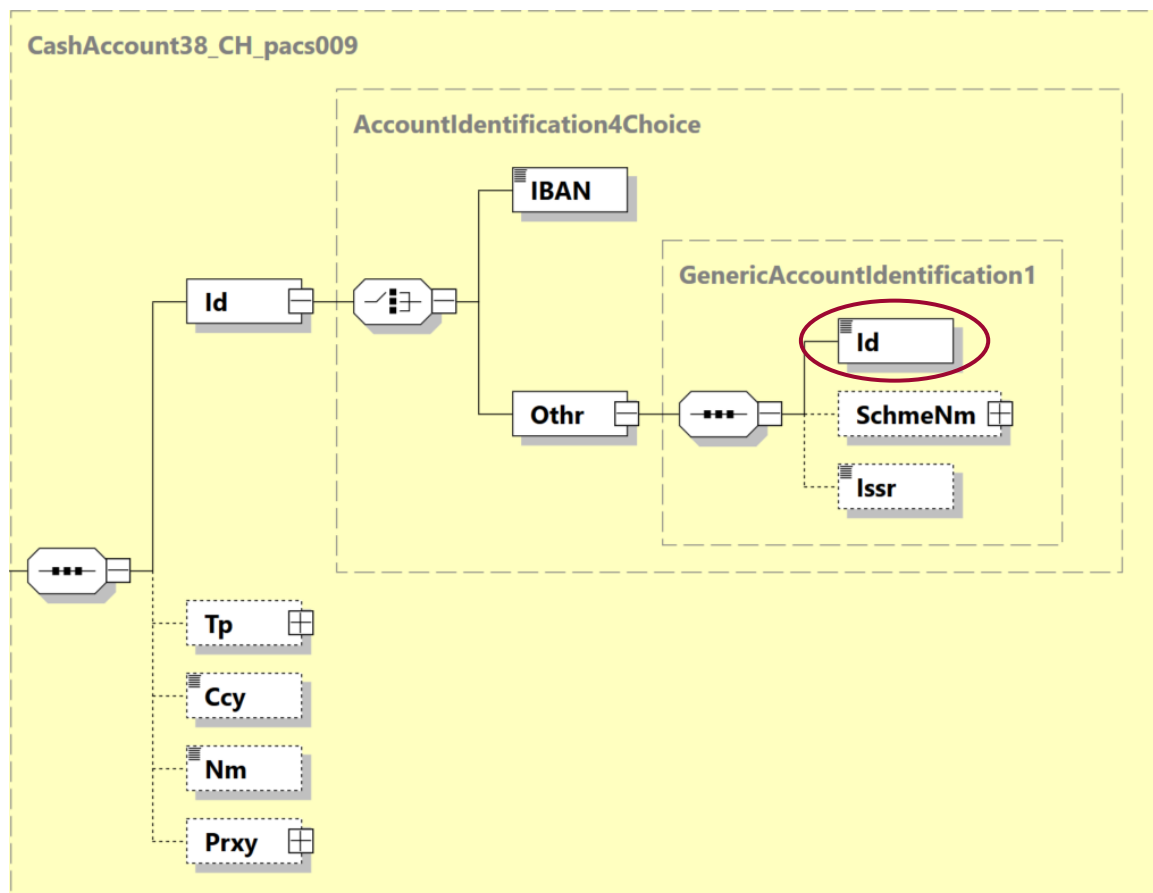


Figure 3: Account identification (Identification)

This rule applies to the account information elements for the following parties:

Element	Description	IPLQDT	IPLQDF
CdtTrfTxInf/DbtrAcct	Debtor Account (Settlement account to be debited)	IP transit account of the System Manager	IP settlement account of the participant
CdtTrfTxInf/CdtrAcct	Creditor Account (Settlement account to be credited)	IP settlement account of the participant	IP transit account of the System Manager

Table 5: List of the accounts of all parties (use of account information)

3.6 Use of references

3.6.1 Message reference

“Message Identification” (A-level)

The message identification is a "technical", unique reference of the message. This reference is assigned by the instructing participant when the message is created. The *<MsgId>* is used for duplicate checking at the message level ("technical" duplicate checking).

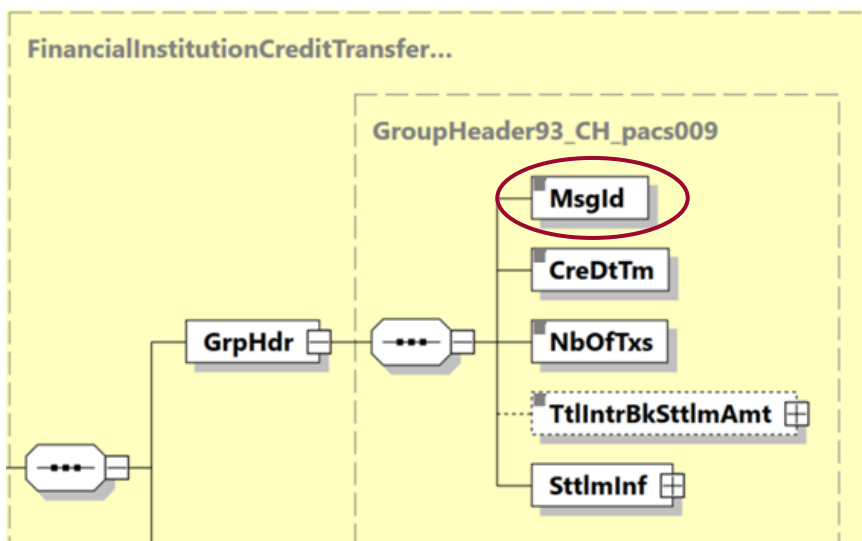


Figure 4: Message Identification

3.6.2 Transaction reference

“Transaction Identification” (B-level)

The transaction identification is the unique reference of a transaction. This reference is assigned by the instructing participant when the transaction is created. The transaction identification is used for the "operational" duplicate checking at the transaction level.

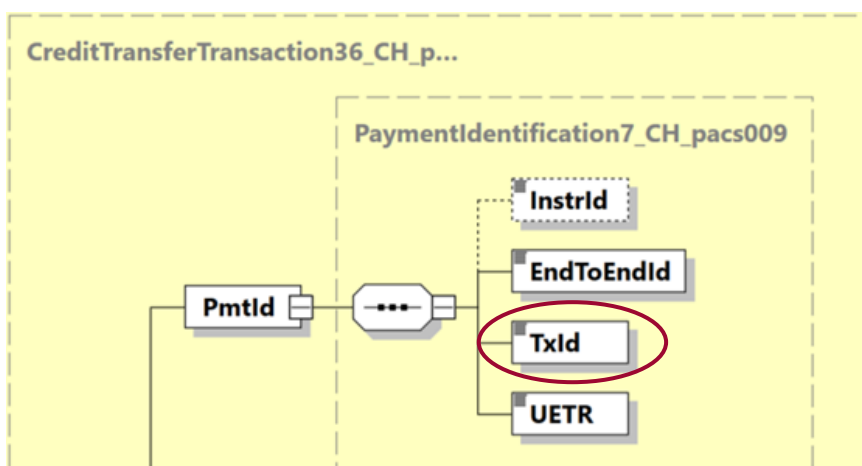


Figure 5: Transaction Identification

3.6.3 Debtor reference

"End to End Identification"

The System Manager can provide the payment with a unique reference which is forwarded unchanged throughout the whole processing chain in the "End to End Identification" element.

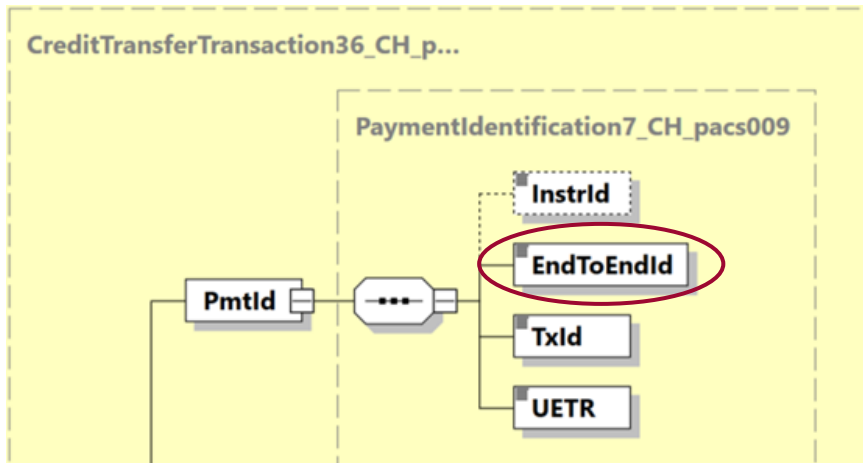


Figure 6: Debtor Reference (End to End Identification)

3.6.4 Unique End-to-end Transaction Reference

«UETR»

The UETR is a globally unique reference created by the System Manager.

The UETR corresponds to a Universally Unique Identifier (UUID) according to RFC 4122 version 4. The SIC IP service only checks the UETR against the specifications as per the ISO 20022 schema definition.

3.7 Further business specifications

Further business specifications can be found in the base document.

4 Technical specifications

4.1 Group Header (GrpHdr, A-level)

The "Group Header" (A-level of the message) occurs exactly once in the message and contains the following elements:

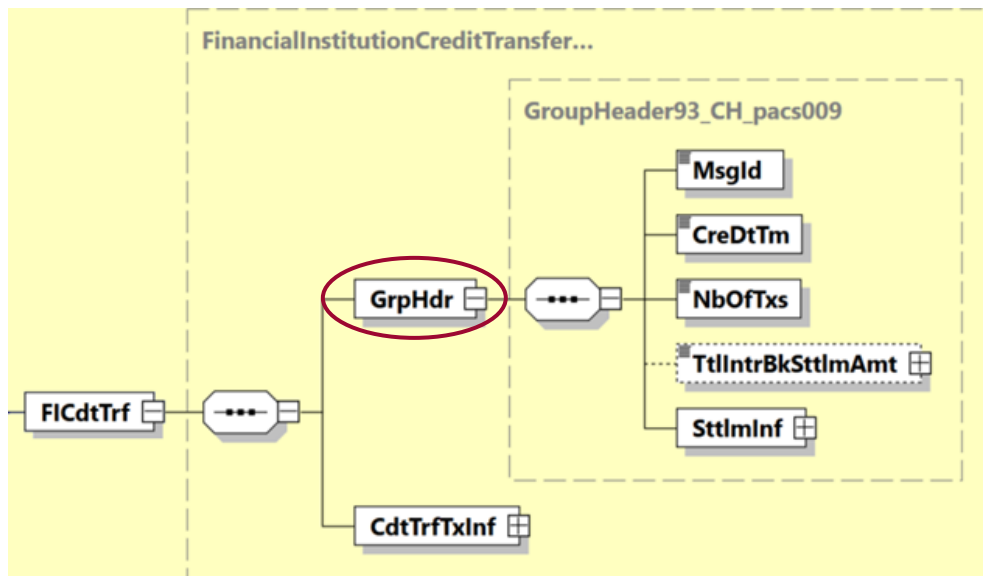


Figure 7: Group Header (GrpHdr)

The following table specifies all the elements of the "Group Header" of the "pacs.009" message that are relevant to the SIC IP service.


ISO 20022 Standard			Swiss ISO 20022 Payments Standard for Instant Payments	
Message Item	XML Tag	Mult	Mult	Definition
Document +Financial Institution Credit Transfer V08	FICdtTrf	1..1	1..1	
Group Header	GrpHdr	1..1	1..1	
Group Header +Message Identification	MsgId	1..1	1..1	Message Identification Only the restricted character set for references (excluding spaces) is permitted for this element. It is used together with <InstgAgt> for duplicate checking at message level and may only occur once within the permitted clearing days in SIC IP service. Permitted clearing days are clearing day today and 1 day in the past. Note: For a payment to be processed successfully, no duplicates must be detected at either message level or transaction level.
Group Header +Creation Date Time	CreDtTm	1..1	1..1	Creation Date Time See chapter "Times in all services (ISODatetime)" in the Implementation Guideline "Base Document".
Group Header +Number Of Transactions	NbOfTxS	1..1	1..1	Number of Transactions The entry for the number of transactions must be "1".
Group Header +Total Interbank Settlement Amount	TtlIntrBkSttlmAmt	0..1	0..1	Total Settlement Amount If present, the amount must be identical with the settlement amount in the <IntrBkSttlmAmt> element. Must contain no more than 13 digits (excl. decimal separator) including a maximum of 2 fractional digits. Amount must be >0.
	@ Ccy			Currency Code The currency code must be CHF.
Group Header +Settlement Information	SttlmInf	1..1	1..1	Settlement Information
Group Header +Settlement Information ++Settlement Method	SttlmMtd	1..1	1..1	Settlement Method Content must be CLRG (Clearing).
Group Header +Settlement Information ++Settlement Account	SttlmAcct	0..1	0..1	Settlement Account Must not be used.
Group Header +Settlement Information ++Clearing System	ClrSys	0..1	1..1	Clearing System Must be used to identify the clearing system.

ISO 20022 Standard			Swiss ISO 20022 Payments Standard for Instant Payments	
Message Item	XML Tag	Mult	Mult	Definition
Group Header +Settlement Information ++Clearing System +++Code	Cd	1..1	1..1	Clearing System Identification (code) Identification of the clearing system, the following code values are available: SIC IP service (CHF only) = value SIP must be used

Table 6: Group Header (GrpHdr, A-level)

4.2 Credit Transfer Transaction Information (CdtTrfTxInf, B-level)

The "Credit Transfer Transaction Information" (B-level of the message) contains the following information about the payment or transaction:

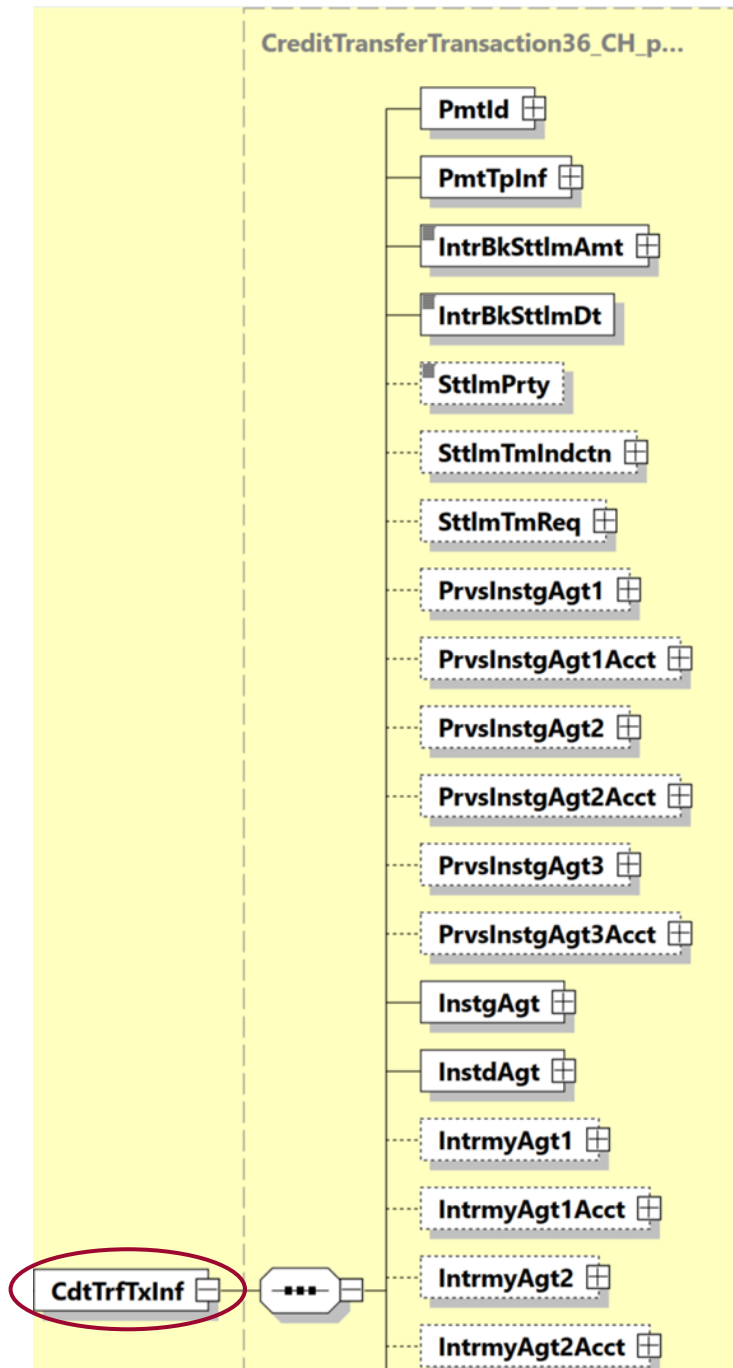

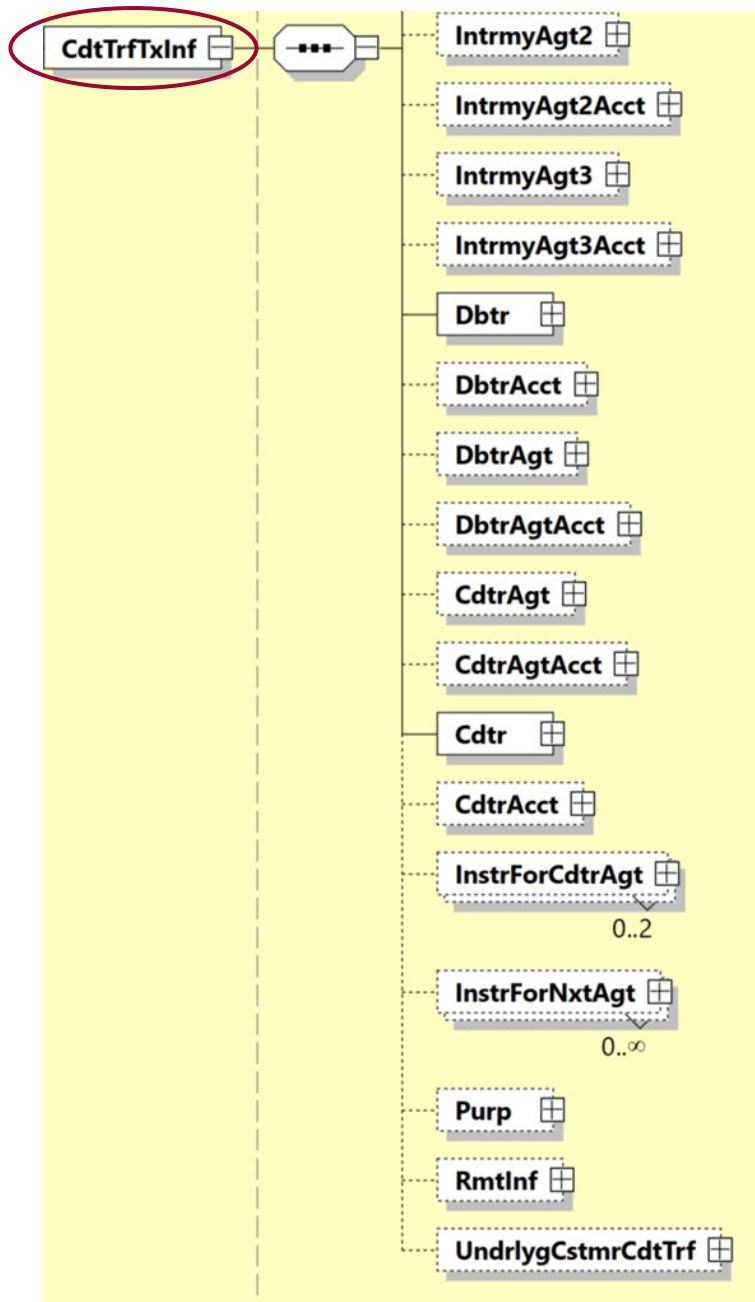


Figure 8: Credit Transfer Transaction Information (CdtTrfTxInf)

The following table specifies all the elements of the "Credit Transfer Transaction Information" of the "pacs.009" message that are relevant to the SIC IP service.

ISO 20022 Standard			Swiss ISO 20022 Payments Standard for Instant Payments	
Message Item	XML Tag	Mult	Mult	Definition
Credit Transfer Transaction Information	CdtTrfTxInf	1..n	1..1	
Credit Transfer Transaction Information +Payment Identification	PmtId	1..1	1..1	Payment References
Credit Transfer Transaction Information +Payment Identification ++Instruction Identification	InstrId	0..1	0..1	Additional Transaction Identification
Credit Transfer Transaction Information +Payment Identification ++End To End Identification	EndToEndId	1..1	1..1	Debtor Reference The element can be supplied with value NOTPROVIDED if there is no known identification.
Credit Transfer Transaction Information +Payment Identification ++Transaction Identification	TxId	0..1	1..1	Transaction Identification Only the restricted character set for references (excluding spaces) is permitted for this element. Only 16 characters permitted, must contain a digit 0 - 9 or a letter a - z or A - Z in the first position. It is used together with <InstgAgt> for duplicate checking at transaction level and may only occur once within the permitted clearing days in SIC IP service. Permitted clearing days are clearing day today and 1 day in the past. Note: For a payment to be processed successfully, no duplicates must be identifiable at either message level or transaction level.
Credit Transfer Transaction Information +Payment Identification ++UETR	UETR	0..1	1..1	Unique End-to-end Transaction Reference This identification contains a Universally Unique Identifier (UUID) according to RFC 4122 version 4. The UETR is only checked against the schema definition according to ISO 20022.
Credit Transfer Transaction Information +Payment Type Information	PmtTpInf	0..1	1..1	Payment Type Information
Credit Transfer Transaction Information +Payment Type Information ++Instruction Priority	InstrPrty	0..1	0..1	Instruction Priority Must not be used.

ISO 20022 Standard			Swiss ISO 20022 Payments Standard for Instant Payments	
Message Item	XML Tag	Mult	Mult	Definition
Credit Transfer Transaction Information +Payment Type Information ++Service Level	SvcLvl	0..n	0..3	Service Level Must not be used.
Credit Transfer Transaction Information +Payment Type Information ++Local Instrument	LclInstrm	0..1	1..1	Payment Type Must be used for indicating system-specific codes to identify the payment type.
Credit Transfer Transaction Information +Payment Type Information ++Local Instrument +++Proprietary	Prtry	1..1	1..1	Payment Type (proprietary) Identification of the payment type, the following code values for payment types are available: IPLQDT = IP liquidity distribution to IP settlement account IPLQDF = IP liquidity distribution from IP settlement account
Credit Transfer Transaction Information +Payment Type Information ++Category Purpose	CtgyPurp	0..1	0..1	Category Purpose Must not be used.
Credit Transfer Transaction Information +Interbank Settlement Amount	IntrBkSttlmAmt	1..1	1..1	Settlement Amount Must contain no more than 13 digits (excl. decimal separator), including a maximum of 2 fractional digits. Amount must be >0.
	@ Ccy			Currency Code Only CHF permitted.
Credit Transfer Transaction Information +Interbank Settlement Date	IntrBkSttlmDt	0..1	1..1	Clearing day Content is ignored. The confirmed clearing day of the settlement can be found in the "IP Execution Confirmation [EXC002]" (pacs.002).
Credit Transfer Transaction Information +Settlement Priority	SttlmPrty	0..1	0..1	Settlement Priority Must not be used.
Credit Transfer Transaction Information +Settlement Time Indication	SttlmTmIndctn	0..1	0..1	Settlement Indication Must not be used.

ISO 20022 Standard			Swiss ISO 20022 Payments Standard for Instant Payments	
Message Item	XML Tag	Mult	Mult	Definition
Credit Transfer Transaction Information +Settlement Time Request	SttlmTmReq	0..1	0..1	Settlement Time Request Must not be used.
Credit Transfer Transaction Information +Previous Instructing Agent 1	PrvsInstgAgt1	0..1	0..1	Previous Instructing Agent 1 Must not be used.
Credit Transfer Transaction Information +Previous Instructing Agent 1 Account	PrvsInstgAgt1Acct	0..1	0..1	Previous Instructing Agent 1 Account Must not be used.
Credit Transfer Transaction Information +Previous Instructing Agent 2	PrvsInstgAgt2	0..1	0..1	Previous Instructing Agent 2 Must not be used.
Credit Transfer Transaction Information +Previous Instructing Agent 2 Account	PrvsInstgAgt2Acct	0..1	0..1	Previous Instructing Agent 2 Account Must not be used.
Credit Transfer Transaction Information +Previous Instructing Agent 3	PrvsInstgAgt3	0..1	0..1	Previous Instructing Agent 3 Must not be used.
Credit Transfer Transaction Information +Previous Instructing Agent 3 Account	PrvsInstgAgt3Acct	0..1	0..1	Previous Instructing Agent 3 Account Must not be used.
Credit Transfer Transaction Information +Instructing Agent	InstgAgt	0..1	1..1	Instructing Participant Must be used. Is used together with <MsgId> / <TxId> for duplicate checking. For addressing the participant, <ClrSysMmbId> element must be used. IPLQDT: Must include the identification of the System Manager which is assigned with the IP transit account. IPLQDF: Must include the identification of the IP participant.
Credit Transfer Transaction Information +Instructing Agent ++Financial Institution Identification	FinInstnId	1..1	1..1	Financial Institution Identification

ISO 20022 Standard			Swiss ISO 20022 Payments Standard for Instant Payments	
Message Item	XML Tag	Mult	Mult	Definition
Credit Transfer Transaction Information +Instructing Agent ++Financial Institution Identification +++BICFI	BICFI	0..1	0..1	Identification of Instructing Participant (BIC) Must not be used.
Credit Transfer Transaction Information +Instructing Agent ++Financial Institution Identification +++Clearing System Member Identification	ClrSysMmbId	0..1	0..1	Identification of Instructing Participant (proprietary) Must be used. Must contain a valid identification of an active participant. Must not be concatenated.
Credit Transfer Transaction Information +Instructing Agent ++Financial Institution Identification +++Clearing System Member Identification ++++Clearing System Identification	ClrSysId	0..1	1..1	Clearing System Identification Must be used to identify the identification type.
Credit Transfer Transaction Information +Instructing Agent ++Financial Institution Identification +++Clearing System Member Identification ++++Clearing System Identification +++++Code	Cd	1..1	1..1	Clearing System Identification (code) Permitted ISO code value: CHSIC (SIC IID (=6n)).
Credit Transfer Transaction Information +Instructing Agent ++Financial Institution Identification +++Clearing System Member Identification ++++Member Identification	MmbId	1..1	1..1	Member Identification SIC IID (=6n), must be contained in the bank master data, active, and not concatenated. IPLQDT: SIC IID of the System Manager which is assigned with the IP transit account. IPLQDF: SIC IID of the IP participant.

ISO 20022 Standard			Swiss ISO 20022 Payments Standard for Instant Payments	
Message Item	XML Tag	Mult	Mult	Definition
Credit Transfer Transaction Information +Instructed Agent	InstdAgt	0..1	1..1	Instructed Participant Must be used. For addressing the participant, <ClrSysMmbId> element must be used. The instructed participant has a settlement account in the destination service which is credited. IPLQDT: Must include the identification of the IP participant. IPLQDF: Must include the identification of the System Manager which is assigned with the IP transit account.
Credit Transfer Transaction Information +Instructed Agent ++Financial Institution Identification	FinInstnId	1..1	1..1	Financial Institution Identification
Credit Transfer Transaction Information +Instructed Agent ++Financial Institution Identification +++BICFI	BICFI	0..1	0..1	Identification of Instructed Participant (BIC) Must not be used.
Credit Transfer Transaction Information +Instructed Agent ++Financial Institution Identification +++Clearing System Member Identification	ClrSysMmbId	0..1	0..1	Identification of Instructed Participant (proprietary) Must be used. Must contain a valid identification of an active participant. Must not be concatenated.
Credit Transfer Transaction Information +Instructed Agent ++Financial Institution Identification +++Clearing System Member Identification ++++Clearing System Identification	ClrSysId	0..1	1..1	Clearing System Identification Must be used to identify the identification type.

ISO 20022 Standard			Swiss ISO 20022 Payments Standard for Instant Payments	
Message Item	XML Tag	Mult	Mult	Definition
Credit Transfer Transaction Information +Instructed Agent ++Financial Institution Identification +++Clearing System Member Identification ++++Clearing System Identification +++++Code	Cd	1..1	1..1	Clearing System Identification (code) Permitted ISO code value: CHSIC (SIC IID (=6n)).
Credit Transfer Transaction Information +Instructed Agent ++Financial Institution Identification +++Clearing System Member Identification ++++Member Identification	MmbId	1..1	1..1	Member Identification SIC IID (=6n), must be contained in the bank master data, active, and not concatenated. IPLQDT: SIC IID of the IP participant. IPLQDF: SIC IID of the System Manager which is assigned with the IP transit account.
Credit Transfer Transaction Information +Instructed Agent ++Financial Institution Identification +++Other	Othr	0..1	0..1	Must not be used.
Credit Transfer Transaction Information +Intermediary Agent 1	IntrmyAgt1	0..1	0..1	Intermediary Agent 1 Must not be used.
Credit Transfer Transaction Information +Intermediary Agent 1Account	IntrmyAgt1Acct	0..1	0..1	Intermediary Agent 1 Account Must not be used.
Credit Transfer Transaction Information +Intermediary Agent 2	IntrmyAgt2	0..1	0..1	Intermediary Agent 2 Must not be used.
Credit Transfer Transaction Information +Intermediary Agent 2Account	IntrmyAgt2Acct	0..1	0..1	Intermediary Agent 2 Account Must not be used.

ISO 20022 Standard			Swiss ISO 20022 Payments Standard for Instant Payments	
Message Item	XML Tag	Mult	Mult	Definition
Credit Transfer Transaction Information +Intermediary Agent 3	IntrmyAgt3	0..1	0..1	Intermediary Agent 3 Must not be used.
Credit Transfer Transaction Information +Intermediary Agent 3Account	IntrmyAgt3Acct	0..1	0..1	Intermediary Agent 3 Account Must not be used.
Credit Transfer Transaction Information +Debtor	Dbtr	1..1	1..1	Debtor Must be identical with <InstgAgt>.
Credit Transfer Transaction Information +Debtor Account	DbtrAcct	0..1	0..1	Debtor Account Must be used for specifying the settlement account to be debited in the SIC IP service. The SIC IID specified under <InstgAgt> must be assigned with the settlement account specified here.
Credit Transfer Transaction Information +Debtor Account ++Identification	Id	1..1	1..1	Account Identification
Credit Transfer Transaction Information +Debtor Account ++Identification +++IBAN	IBAN {Or	1..1	1..1	IBAN Must not be used.
Credit Transfer Transaction Information +Debtor Account ++Identification +++Other	Othr Or}	1..1	1..1	Proprietary Account Format Must be used.
Credit Transfer Transaction Information +Debtor Account ++Identification +++Other ++++Identification	Id	1..1	1..1	Account (proprietary) Must be used. Contains account number of an active settlement account in the SIC IP service (format =6n). IPLQDT: Must contain the IP transit account. IPLQDF: Must contain the IP settlement account of the participant

ISO 20022 Standard			Swiss ISO 20022 Payments Standard for Instant Payments	
Message Item	XML Tag	Mult	Mult	Definition
Credit Transfer Transaction Information +Debtor Account ++Identification +++Other ++++Scheme Name	SchmeNm	0..1	0..1	Account Type Must not be used.
Credit Transfer Transaction Information +Debtor Account ++Identification +++Other ++++Issuer	Issr	0..1	0..1	Account Issuer Must not be used.
Credit Transfer Transaction Information +Debtor Account ++Type	Tp	0..1	0..1	Type or purpose of the account Must not be used.
Credit Transfer Transaction Information +Debtor Account ++Currency	Ccy	0..1	0..1	Account currency Must not be used.
Credit Transfer Transaction Information +Debtor Account ++Name	Nm	0..1	0..1	Account name Must not be used.
Credit Transfer Transaction Information +Debtor Account ++Proxy	Prxy	0..1	0..1	Alternative account identification Must not be used.
Credit Transfer Transaction Information +Debtor Agent	DbtrAgt	0..1	0..1	Debtor Agent Must not be used.
Credit Transfer Transaction Information +Debtor Agent Account	DbtrAgtAcct	0..1	0..1	Debtor Agent Account Must not be used.

ISO 20022 Standard			Swiss ISO 20022 Payments Standard for Instant Payments	
Message Item	XML Tag	Mult	Mult	Definition
Credit Transfer Transaction Information +Creditor Agent	CdtrAgt	0..1	0..1	Creditor Agent Must not be used.
Credit Transfer Transaction Information +Creditor Agent Account	CdtrAgtAcct	0..1	0..1	Creditor Agent Account Must not be used.
Credit Transfer Transaction Information +Creditor	Cdtr	1..1	1..1	Creditor Must be identical with <InstdAgt>.
Credit Transfer Transaction Information +Creditor Account	CdtrAcct	0..1	0..1	Creditor Account Must be used for specifying the settlement account to be credited in the SIC IP service. The SIC IID specified under <InstdAgt> must be assigned with the settlement account specified here.
Credit Transfer Transaction Information +Creditor Account ++Identification	Id	1..1	1..1	Account Identification
Credit Transfer Transaction Information +Creditor Account ++Identification +++IBAN	IBAN {Or	1..1	1..1	IBAN Must not be used.
Credit Transfer Transaction Information +Creditor Account ++Identification +++Other	Othr Or}	1..1	1..1	Proprietary Account Format Must be used.
Credit Transfer Transaction Information +Creditor Account ++Identification +++Other ++++Identification	Id	1..1	1..1	Account (proprietary) Must be used. Contains account number of an active settlement account in the SIC IP service (format =6n). IPLQDT: Must contain the IP settlement account of the participant IPLQDF: Must contain the IP transit account.

ISO 20022 Standard			Swiss ISO 20022 Payments Standard for Instant Payments	
Message Item	XML Tag	Mult	Mult	Definition
Credit Transfer Transaction Information +Creditor Account ++Identification +++Other ++++Scheme Name	SchmeNm	0..1	0..1	Account Type Must not be used.
Credit Transfer Transaction Information +Creditor Account ++Identification +++Other ++++Issuer	Issr	0..1	0..1	Account Issuer Must not be used.
Credit Transfer Transaction Information +Creditor Account ++Type	Tp	0..1	0..1	Type or purpose of the account Must not be used.
Credit Transfer Transaction Information +Creditor Account ++Currency	Ccy	0..1	0..1	Account currency Must not be used.
Credit Transfer Transaction Information +Creditor Account ++Name	Nm	0..1	0..1	Account name Must not be used.
Credit Transfer Transaction Information +Creditor Account ++Proxy	Prxy	0..1	0..1	Alternative account identification Must not be used.
Credit Transfer Transaction Information +Instruction For Creditor Agent	InstrForCdtrAgt	0..n	0..2	Instruction for Creditor Agent Must not be used.
Credit Transfer Transaction Information +Instruction For Next Agent	InstrForNxtAgt	0..n	0..n	Processing Instruction Must not be used.

ISO 20022 Standard			Swiss ISO 20022 Payments Standard for Instant Payments	
Message Item	XML Tag	Mult	Mult	Definition
Credit Transfer Transaction Information +Purpose	Purp	0..1	0..1	Transaction Purpose Must not be used.
Credit Transfer Transaction Information +Remittance Information	RmtInf	0..1	0..1	Remittance Information
Credit Transfer Transaction Information +Remittance Information ++Unstructured	Ustrd	0..n	1..1	Remittance Information Unstructured
Credit Transfer Transaction Information +Underlying Customer Credit Transfer	UndrlygCstmrCdtTrf	0..1	0..1	Underlying Customer Credit Transfer Must not be used.

Table 7: Credit Transfer Transaction Information (CdtTrfTxInf, B-level)